


# LES Heavy Duty Lever Hoist

## HSH-A Series



<b>Finish</b>	Black painted casing, hooks and load chain. Electro galvanised hand chain.
<b>Standard</b>	Meets the W.L.L. performance requirements of BS EN 13157. Load chain is Grade 80 (T - Fine tolerance calibrated) case hardened and meets the W.L.L. performance requirements of BS EN 818-7.
<b>Safety Factor</b>	MBL equals 4 x W.L.L.
<b>Markings</b>	<b>LES</b> , <b>CE</b> , <b>UK</b> , mfg. date, capacity, height of lift, chain grade & size and serial number
<b>Notes</b>	Top and bottom hooks fitted with pressed steel catches. For heights of lift above 12 mtrs please consult LES for technical advice. Easy to use free wheel mechanism that enables chain to be pulled freely when not under load.
<b>Certification</b>	2.1 DoC

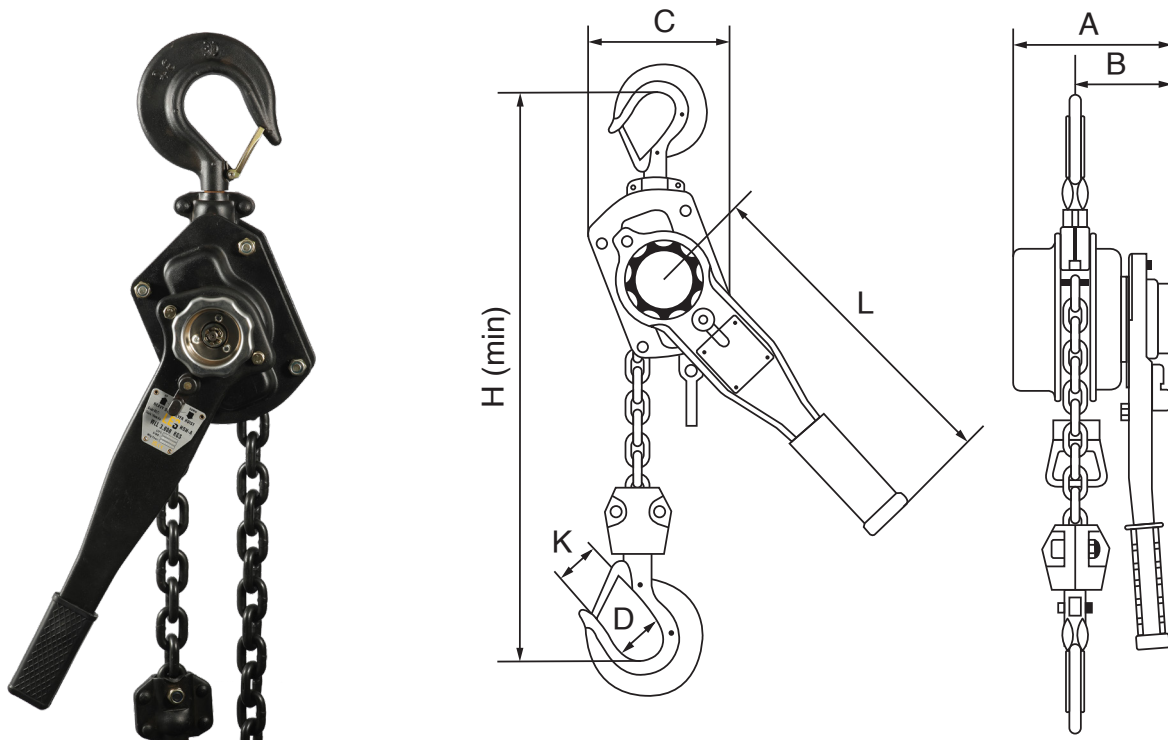

Product Code		Capacity	A	B	C	D	H (min)	K	L	Effort req. to lift max load	Load Chain Size	No. of Falls	Weight 1.5 mtr HOL
1.5 mtr	Carcase	kgs	mm	mm	mm	mm	mm	mm	mm	N	mm		kgs
LESHDLH0.75T1.5	LESHDLH0.75TC	750	148	90	136	40	320	27	280	140	6 x 18	1	7.4
LESHDLH1.5T1.5	LESHDLH1.5TC	1,500	172	98	160	44	380	34	410	220	7.1 x 21	1	11.6
LESHDLH3T1.5	LESHDLH3TC	3,000	200	115	180	50	480	38	410	320	10 x 30	1	20
LESHDLH6T1.5	LESHDLH6TC	6,000	200	115	235	64	600	48	410	340	10 x 30	2	29.4
LESHDLH9T1.5	LESHDLH9TC	9,000	200	115	330	85	700	57	410	460	10 x 30	3	45