


Grade 8 Fram Master Link – FML

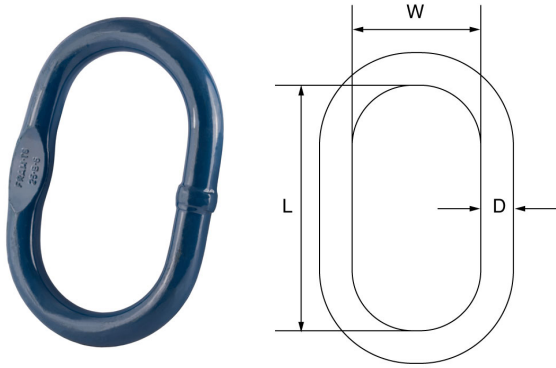

- Alloy steel, quenched and tempered.
- Blue painted finish.
- Type approved according to DNV GL.
- Conforms to BS EN 1677-4.
- Minimum breaking load is 5 times the W.L.L.
- Certification available **2.1** **3.1** **DoC**

Product Code	Part No.	D	L	W	W.L.L.	Weight
		mm	mm	mm	t	kgs
FML13B5	13B5	13	95	54	2.7	0.3
FML13B6	13B6	13	115	60	2.7	0.4
FML16B6	16B6	16	120	70	4.1	0.6
FML16B7	16B7	16	190	100	3.2	0.9
FML20B6	20B6	20	150	82	6.7	1.1
FML20B7	20B7	20	170	90	6.5	1.3

Product Code	Part No.	D	L	W	W.L.L.	Weight
		mm	mm	mm	t	kgs
FML22B6	22B6	22	170	90	8.2	1.6
FML22B7	22B7	22	210	110	7.2	1.9
FML22B8	22B8	22	270	140	5.8	2.5
FML25B6	25B6	25	190	103	10.7	2.3
FML28B6	28B6	28	210	112.5	12.9	3.2
FML28B7	28B7	28	270	140	11.8	4
FML32B6	32B6	32	270	140	17.1	5.3
FML38B6	38B6	38	270	140	28.1	7.6
FML38B7	38B7	38	420	220	19.1	11
FML45B6	45B6	45	320	170	38.3	12.5
FML45B7	45B7	45	470	250	27.6	17.5
FML50B6	50B6	50	380	200	45	18
FML60B6	60B6	60	430	220	65.3	29
FML70B6	70B6	70	500	250	84.4	43.2