


Combi Tipping Skip

Model - ICUS

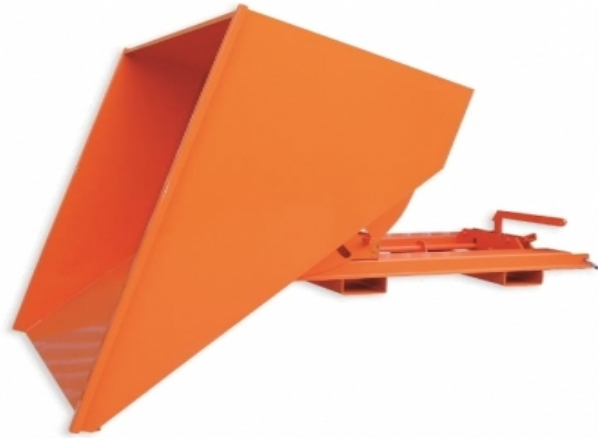

Description

Designed to simplify the holding, movement and disposal of material in confined areas with the unique '4 way entry' base. The skip is supplied as manual operation as standard, but automatic tipping at high level can be achieved by ordering the conversion kit allowing the forklift / tele handler driver to empty the skip without leaving the safety of his seat.

Model	Nominal Capacity (m ³)	Capacity (kg)	Body Length (mm)	Body Width (mm)	Body Height (mm)	Weight (kg)	C of G (mm)	LLC (mm)
ICUS-0	0.5	400	1220**	1030	690*	166	760	N/A
ICUS-1	0.9	750	1600**	1060	830*	222	785	N/A
ICUS-2	1.2	960	1600**	1300	830*	229	725	N/A
ICUS-3	1.5	1100	1600**	1560	830*	251	685	N/A
ICUS-4	1.8	1500	1800**	1560	955*	277	650	N/A

*Add 205mm to body height to give overall skip height

** Add 230mm to body length to give overall skip length

Standard Features

- Low loading height
- Reinforced leading edge and body sides
- 4 way fork pocket entry
- Secondary Locking Mechanism to prevent accidental discharge
- Fully seam welded for retention of fluids
- Manual handle override
- Maximum fork section 150 x 50 mm at 675 mm centres
- Zinc plated heel pins for safe attachment to truck
- Painted bright orange for safety

Optional Features

- Conversion kit for automatic operation
- 125mm diameter nylon castors
- Colour finish for waste separation or department

